VILLAGE OF RICHFIELD, WISCONSIN 2015 HIGHWAY IMPROVEMENTS PROGRAM

UTILITY CONTACTS

Village of Richfield


Village of Richfield Contact: Jim Healy Village Hall 4128 Hubertus Road Hubertus, WI 53033 (262) 628-2260 Ext. 114

AT&T

Contact: Joel Ostrenga 2005 Pewaukee Rd. Waukesha WI, 53188 (262) 896-6527 (Office) (262) 408-1496 (Cell) Email: jo4761@att.com

WE Energies Contact: Thomas Minesal 500 S. 116th Street West Allis, WI 53214 (414) 944-5755

Charter Communications Contact: Tom Harycki 2312 Continental Drive West Bend, WI 53095 262-306-8756 Ext: 20702

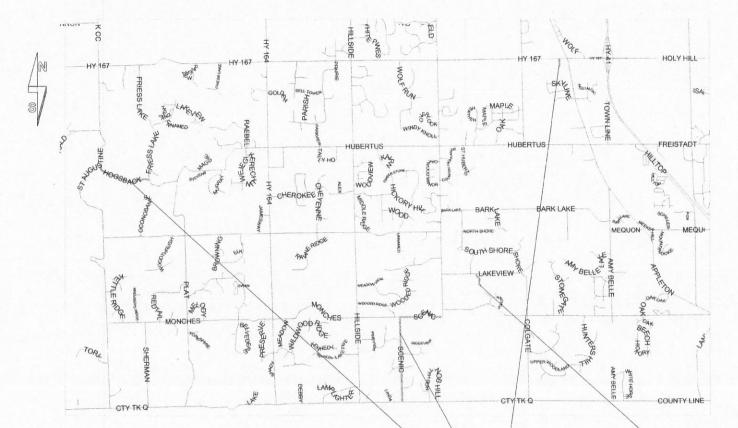

SHEET INDEX

- 1 COVER PAGE
- 2 TYP. X-SECTION / PAVING DETAILS
- 3 BASSWOOD LANE PLAN & PROFILE
- 4-11 SCENIC ROAD PLAN & PROFILE
- 12-14 HOGSBACK ROAD PLAN & PROFILE
- 15 ALTERNATE RIDGEWOOD KNOLL PLAN
- 16 EROSION CONTROL PLAN AND DETAILS

ALTERNATE PROJECT LOCATION


PROJECT LOCATION








December 18, 2014 10:55:41 a.m. Drawing: S:\TOWNS\RICHFIELD\2015 HIGHWAY IMPROVEMENTS\DWG\COVER.DWG SHEET 1 OF 16

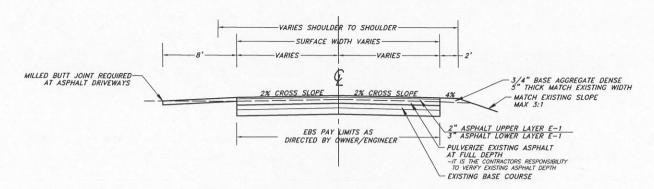


RICHFIELD, WI TYPICAL CROSS SECTION

General Notes

- 1) Pulverize existing asphalt pavement full depth, 5" depth estimated. Pavement removal and saw cutting are incidental to other items.
- 2) All pulverized material is to remain onsite and incorporated into the work.
- 3) Intersection and driveway limits to be transitioning per plan or as directed by engineer/ owner representative.
- 4) Adjust roadway as necessary to match existing driveways.
- 5) Existing driveways shall be transitioned to final road grade with pulverized material and 3" asphalt surface course. Any concrete driveways inside the road right of way that require grade transition shall be cut back as directed by the engineer/owner representative and transitioned to finished grade with hot mix asphalt.
- 6) Shaping of shoulders to finished cross section with delivered aggregate will be paid for under aggregate shoulder. Aggregate shoulder shall be used for matching gravel driveways beyond a 5' minimum apron.

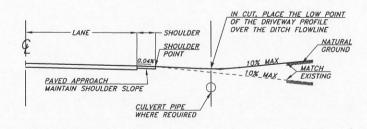

TYPICAL DRIVEWAY PROFILES

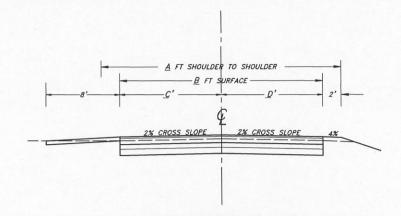

RICHFIELD, WI TYPICAL CROSS SECTION KEY TO TABLES

		BASSWO	OD LANE		
BEGIN STATION	END STATION	<u>A</u> S TO S	<u>B</u> SURFACE	<u>C</u> LEFT LANE	<u>D</u> RIGHT LANE
10+00.	14+16.	26'	22'	11.'	11.'
			TOTAL PAVEMENT AREA		1,606 SQ YD
		SCENIC	DRIVE		
BEGIN STATION	END STATION	A S TO S	<u>B</u> SURFACE	<u>C</u> <u>LEFT LANE</u>	<u>D</u> RIGHT LANE
20+63.	26+70.	27'	23'	11.5'	11.5'
26+70.	28+06.	TAPER PAVEMENT WIDTH			
28+06.	29+07.	35'	31'	11.5'	19.5'
29+07.	29+95.	TAPER PAVEMENT WIDTH			
29+95.	39+33.	27'	23'	11.5'	11.5'
39+33.	40+70.	TAPER PAVEMENT WIDTH			
40+70.	41+56.	45'	41'	20.5'	20.5'
41+56.	43+18.	TAPER PAVEMENT WIDTH			
43+18.	47+79.	27'	23'	11.5'	11.5'
47+79.	49+11.	TAPER PAVEMENT WIDTH			
49+11.	50+15.	44'	40'	20.1	20.1
50+15.	51+49.	TAPER PAVEMENT WIDTH			
51+49.	56+60.	27'	23'	11.5'	11.5'
56+60.	57+92.	TAPER PAVEMENT WIDTH			
57+92.	58+84.	49'	45'	22.5'	22.5'
58+84.	60+33.	TAPER PAVEMENT WIDTH			
60+33.	72+19.	27'	23'	11.5'	11.5'
NTERSECTION					
73+40.	100+78.	26'	22'	11.'	11.'
			TOTAL PAVEMENT AREA		26,126 SQ YD
		HOGSBA	CK ROAD		
BEGIN	END	A	<u>B</u>	<u>C</u>	D
STATION	STATION	<u>s to s</u>	SURFACE	LEFT LANE	RIGHT LANE
11+00.	45+95.	24'	20'	10.'	10.'
			TOTAL PAVEMENT AREA		8,688 SQ YD



REVISED 12/18/14


2CATE: # 2014.K048 2. 11/19/14 = 1.0.14.K048 WW BY: NAC A.2.14.K048


VILLAGE OF RICHFIELD, WISCONSIN
TYPICAL CROSS SECTIONS



SHEET 2 OF 16

TYPICAL CROSS SECTIONS

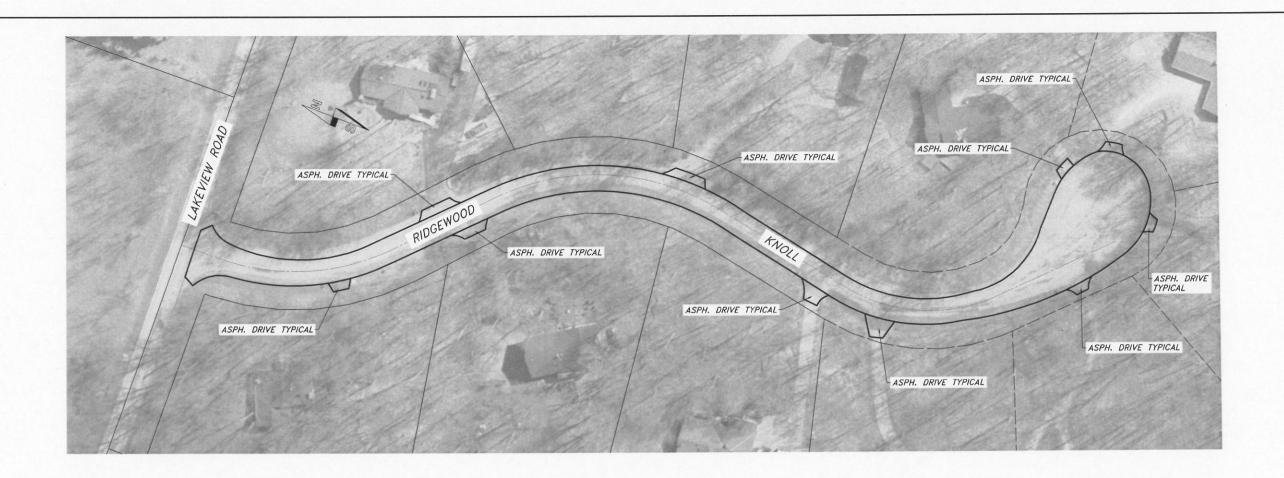

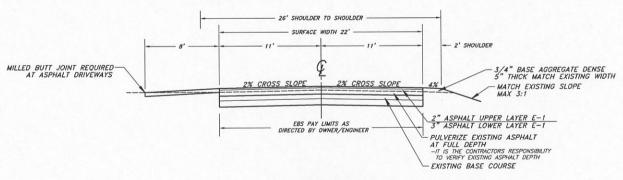


RICHFIELD, WI ALTERNATE RIDGEWOOD KNOLL TYPICAL CROSS SECTION







SHEET 15 OF 16

EROSION CONTROL PLAN & DETAILS

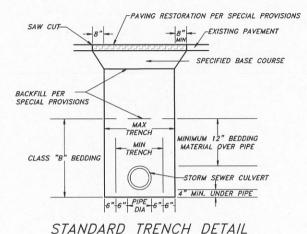

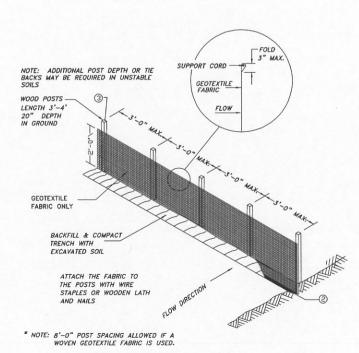

SILT FENCE (WDNR TECHNICAL STANDARD No. 1056)

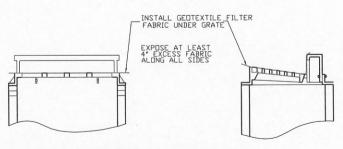

NOTES: GEOTEXTILE FILTER FABRIC SHALL BE REINFORCED WITH AN INDUSTRIAL POLYPROPYLENE NETTING WITH A MAX. MESH SPACING OF 3/4' OR EQUAL. A HEAVY NYLON TOP SUPPORT CORD OR EQUIVALENT IS REQUIRED. FOLD FABRIC 3' OVER

INLET PROTECTION

STANDARD EROSION CONTROL PROVISIONS

Implement Erosion Control Mitigation Procedures as specified herein. Install Silt Fence where called out on the plans per the standard detail and as directed by the Engineer.

The Quantity of silt fence at any location may vary based on field conditions and will be paid for at the contract unit price for silt fence. Implementation of Erosion Control
Mitigation Procedures, which are not provided for on a unit cost basis, will be considered incidental to the Bid Price for the associated construction in the area.

Specific Erosion Control Mitigation Procedures shall consist of the following as applicable:

- 1. Refer to WDNR's Stormwater web page of technical standards @ http://dnr.wi.gov/org/water/wm/nps/stormwater/techstds.htm#Construction
- the WDNR's Stormwater web page of technical standards @ http://dnr.wi.gov/org/water/wm/nps/stormwater/techstds.htm#Construction
- 3. Install sediment control measures prior to any grading or disturbance of existing surface material. Adjust all sediment control measures to meet field conditions at the time of construction.
- 4. Provide weekly inspection and maintenance of all sediment control structures to ensure intended purpose is accomplished. Sediment control measures are to be in working condition at the end of each working day.
- 5. Inspect sediment control structures for integrity after any rainfall of 1/2" or greater. Correct any damaged structures for integrity.
- 6. Do not remove sediment control measures until the areas served have established
- 7. Collect tracked soil from paved roads located near the construction site. All streets shall be swept and cleared of all dirt and debris immediately
- 8. Prevent overland flow from leaving the work site by installing strow bale or fabric filter fencing parallel to the contours located downhill from the work area.
- 9. Sediment control for pipeline construction
- a. Place excavated trench material on the high side of the trench. b. Backfill, compact, and stabilize the trench immediately after pipe
- 10. Seeding for construction site erosion control should be in accordance with the WDNR's Stormwater web page of technical standards @ http://dnr.wi.gov/org/water/wm/nps/stormwater/techstds.htm#Construction
- 11. All land disturbance and stabilization for this project will occur between April 15th and September 15th. Warm season seeding can be used during this time period. If seeding occurs between October 15th and November 15th a temporary seed mix should be used, and should seeding extend past November 15th, a dormant seed must be used. Seed shall not be applied on top of snow.
- 12. Temporary seeding applies to disturbed areas which land—disturbing activities will not be performed for a period greater than 30 days and requires vegetative cover for less than one year. Permanent seeding applies to areas where perennial vegetative cover is needed. All seeding species, rates, and installation practices shall conform to WDNR Conservation Practice Standard 1059.

Exceptions to NR 151 Post-Construction Performance Standard

NR 151.24.1 - Generally exempts the following work:

Reconditioning or resurfacing of a highway. NR 151.24.1(c)

Per s.84.013(1)

Resurfacing means the installation of a new pavement, without improvements to road capacity or geometrics, but may include culvert replacement, clear zone improvement, and intersection improvements.

Reconditioning means work in addition to resurfacing such as pavement and shoulder widening and includes isolated improvements to address safety such as grade, alignment, or intersection work.

Minor reconstruction of a highway. NR 151.24.1(d)

Minor Reconstruction means reconstruction that is limited to 1.5 miles in continuous or aggregate length of realignment and that does not exceed 100 feet of roadbed widening

Redevelopment transportation facility with no increase in exposed parking lots or roads.

Routine maintenance of transportation facilities. NR 151.24.1(j)
If performed to maintain the original line and grade, hydraulic capacity or original use of the facility.

REVISED 12/18/14

SCALE · NTS

DETAILS AND PLAN RICHFIELD,

OF



SHEET 16 OF 16